



Guidelines for
EROSION
AND SEDIMENT
CONTROL
on Building Sites

The content in this booklet is reproduced from *Guidelines for Erosion and Sediment Control on Building Sites* (2001) by the Hawkesbury Nepean Catchment Management Trust with the permission of Greater Sydney Local Land Services.

All material is based on *Managing Urban Stormwater – Soils and Construction* (3rd Edition, 1998) also known as the 'Blue Book'.

Consult the NSW Environment Protection Authority's 'Blue Book' for detailed rules and guidelines relating to sediment and erosion control.

<https://www.environment.nsw.gov.au/research-and-publications/publications-search/managing-urban-stormwater-soils-and-construction-volume-1-4th-edition>

'Get the Site Right' is a joint taskforce between the Parramatta River Catchment Group, Cooks River Alliance, Georges Riverkeeper, Sydney Coastal Councils Group, Lake Macquarie City Council, NSW Environment Protection Authority (EPA), and NSW Department of Planning, Industry and Environment. The campaign targets erosion and sediment control on commercial and residential building sites and major infrastructure projects in Sydney.



LET'S MAKE OUR RIVER
SWIMMABLE AGAIN BY
2025



Contents

Suggested Erosion and Sediment Controls for a 'Typical' Development Site	4
Fact Sheets	
1. Site Planning	5
2. Stabilised Entry/Exit Point	6
3. Sediment Fencing	8
4. Straw Bale Filter	10
5. Diversion of Up-Slope Water	11
6. Stockpiles and Storage of Materials	12
7. Grass Filter Strips	13
8. Litter and Building Waste	14
9. Service Trenches	15
10. Early Roof Downpipe Connection	16
Maintenance of Control Measures	17
Site Clean-Up and Rehabilitation	18

Suggested **Erosion** and **Sediment** Controls for a "Typical" **Development** Site

- ✓ Minimise area to be cleared and leave as much vegetation as possible. Install temporary fences to define 'no go' areas that are not to be disturbed.
- ✓ Install sediment fence(s) along the low side of the site before work begins.
- ✓ Divert water around the work site and stabilise channels, but ensure that you do not flood the neighbouring property.
- ✓ Establish a single stabilised entry/exit point. Clearly mark the access point and give an access map that has a delivery point indicated for all supplies.
- ✓ Leave or lay a kerb-side turf strip (for example, the nature strip) to slow the speed of water flows and to trap sediment.
- ✓ Check the erosion and sediment controls every day and keep them in good working condition.
- ✓ Stockpile topsoil within the sediment controlled zone.
- ✓ Always be aware of the weather forecast.
- ✓ Stabilise exposed earth banks (e.g. vegetation, erosion control mats).
- ✓ Fill in and compact all trenches immediately after services have been laid.
- ✓ Install site waste receptacles (mini-skip, bins, wind-proof litter receptors).
- ✓ Sweep the road and footpath every day and put soil behind the sediment controls. Hosing down roads and footpaths is unacceptable.
- ✓ Connect downpipes from the guttering to the stormwater drain as soon as the roof is installed.
- ✓ Revegetate the site as soon as possible. The erosion and sediment control devices must be kept in place until 70% of the site has been revegetated.

Fact Sheet



Site – Planning

The overall principle is to stop both erosion and sediment leaving your site. However, this requires careful planning and forethought. The way you run your building site can have a large impact on the amount of pollution in stormwater run-off.

When planning the site layout, building location and earthworks, it is possible to make sure control devices don't interfere with the building process. Your council will have guidelines for your DA submission.


- ✓ Avoid stripping and excavating until ready to build.
- ✓ Minimise the reshaping of the land, any fill needs to be well compacted.
- ✓ Allow stormwater to flow around the building area and any disturbed areas.
- ✓ In new estates, temporary revegetation may be required.
- ✓ Allow room for a sediment barrier (e.g. sediment fence) to be located along the lower end of the disturbance.
- ✓ Ensure that stockpiles are stored within the sediment fence.
- ✓ Avoid long, steep, unstable driveways.
- ✓ Limit the amount of material on site to what is required at any one time.
- ✓ Ensure all material is immediately removed from the site at the completion of work.
- ✓ Instruct site workers on the need to prevent materials from washing or blowing into the stormwater system.
- ✓ Ensure all materials are immediately removed from site when work is completed.

Fact Sheet 2

Stabilised Entry/Exit Point

Where possible, the entry/exit point of the site should be managed so sediment is not tracked off the site and it should be restricted to one stabilised location. Note that an appropriate location for the construction entrance may not be the location of the permanent driveway.

The recommended construction method for stabilising the access point is 200 mm of aggregate at 30-40 mm in size (note: crushed sandstone is not suitable). The access should be a minimum 3 metres wide and 15 metres long, or to the building alignment for all residential or sub-division sites. Where possible, the entry/exit area should extend from the kerb to the building footprint. Remember that a large truck must be able to gain access to this site without leaving the stabilised access.

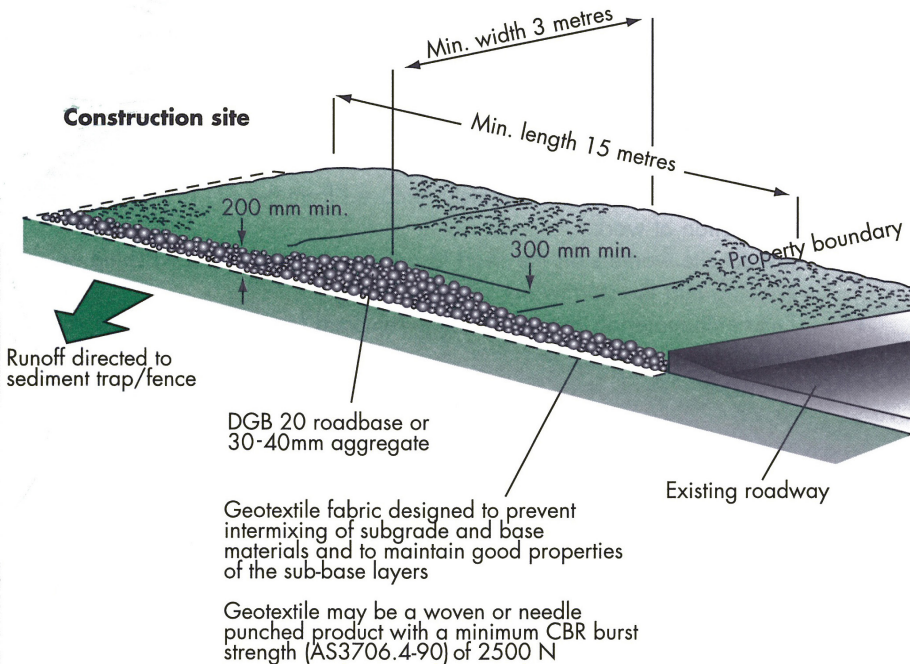

Where the entry/exit area slopes toward the road, a diversion hump should be installed across the stabilised area to direct stormwater run-off to the side where it can be filtered by a sediment fence.

Stabilised access points only require periodic maintenance with the topping up of the rock. Street sweeping on adjacent roads may still be required.

Advantages. The advantages to builders of stabilising the access point is that restricting vehicular movement allows the entire site to be more stable and durable during wet weather. After wet weather, work can begin on the site more quickly due to the area being stable. This prevents the most heavily travelled routes from becoming a source of sediment and reduces the likelihood of vehicles bogging on site.

Remember that extra crushed rock or recycled concrete needs to be added to maintain its effectiveness.

Construction Notes

1. Strip at least 150 mm of topsoil, level area and stockpile on site if space available.
2. Compact sub-grade.
3. Cover area with needle-punched geotextile.
4. Construct a 200 mm thick pad over geotextile using aggregate at least 40 mm in size. Minimum length 15 metres or to building alignment. Minimum width 3 metres.
5. Construct diversion hump immediately within boundary to divert water to a sediment fence or other sediment trap.

Fact Sheet 3

Sediment Fencing


The most efficient and widely accepted sediment barrier for construction sites is a specially manufactured geotextile sediment fence. Sediment fences act like dams - trapping the sediment while allowing water to leave the site. They are effective in retaining suspended solids coarser than 0.02 mm. They are simple to construct, relatively inexpensive and easily moved as development proceeds.

When using a sediment fence, keep in mind that it will be effective within the following parameters:

- It is generally not designed to filter concentrated flows and therefore needs to be placed following the contours whenever possible.
- It should last for up to six months but requires regular maintenance and weekly checks are needed. The performance of a sediment fence diminishes considerably when crushed by delivery of building materials. It must remain vertical and keyed into the soil.
- Where the sediment fence is not installed correctly water will inevitably flow through the point of least resistance. Damaged fences must be repaired promptly.
- Sediment fences need to be trenched in at least 150 mm and buried so the water flows through and not underneath.
- Soil on both sides of the fence must be compacted to avoid seepage under the barrier.

On a typical residential building block (approx. 700sq.m), a sediment fence should work well providing it is situated on the low side of the block. If there needs to be a break in the fence for any reason (say, an access point) a contour bank/diversion bank or bund needs to be constructed to direct water back to the fence. The sediment fence must have uphill returns at either end to prevent sediment flowing around it.

Advantages. It is a simple strategy that is easily installed, shifted or removed. Sediment fences work well and, if maintained, will last for the duration of the construction stage.

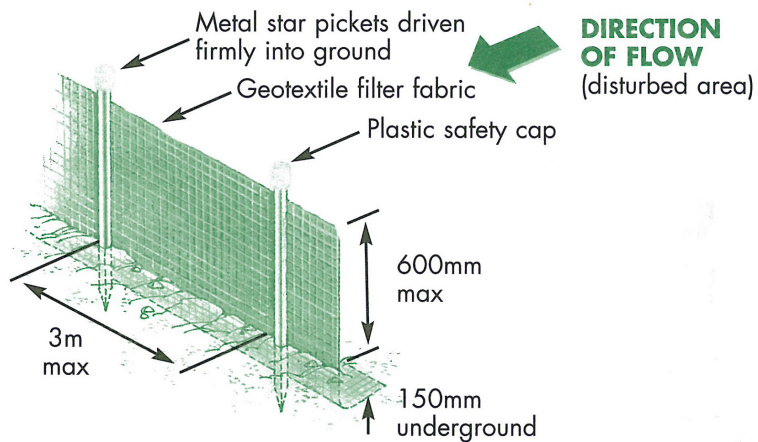

Construction Notes

1. Construct sediment fences as close as possible to follow the contours of the site.
2. Drive 1.5 metre long posts into ground, maximum 3 metres apart.
3. Staple to 40 mm square hardwood posts or wire tied to steel posts.
4. Dig a 150 mm deep trench along the up-slope line of the fence for the bottom of the fabric to be entrenched.
5. Backfill trench over base of fabric and compact on both sides.

Fact Sheet 4


Straw Bale Filter

Straw bales are suitable for low flows of water. It is only recommended that these are used in limited applications such as reducing the flow velocity.

The return of straw bales every 20 metres is recommended to ensure some stability for this style of barrier. Please note that they need to be embedded in the ground and held firmly in place with star pickets.

The minimum number of bales to be used is four. If only two bales are used during a storm event, the water will simply hit the bales and flow around, increasing erosion. The bales must dam the run off and allow the sediment to settle behind the bales.

Please note straw bales do not filter sediment-laden waters. They will only hold back water if installed correctly.

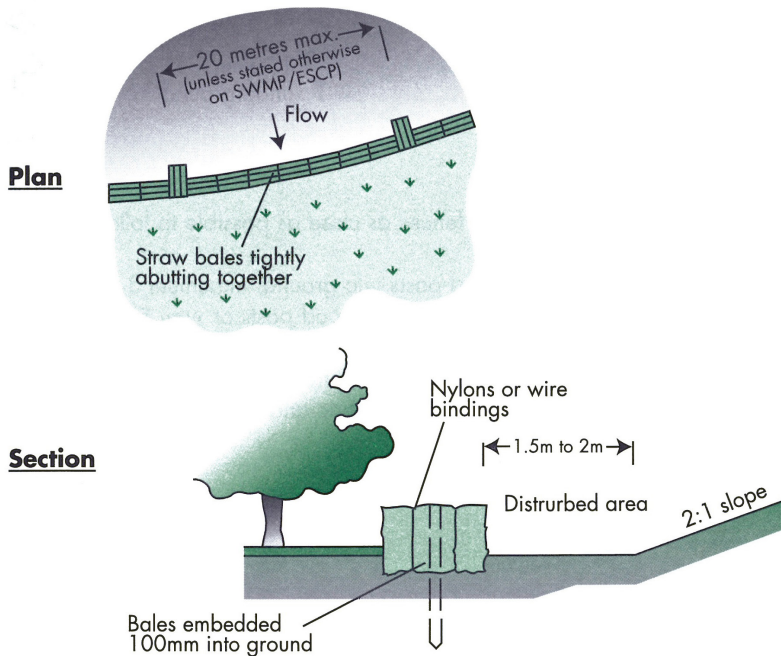


Fact Sheet 5

Diversion of Up-Slope Water

Where practical, or where stormwater run-off is more than 0.5 hectare, up-slope water should be diverted around the site. Stormwater can be diverted with the use of small turf or geotextile lined catch drains, or with the use of diversion banks.

Diverted stormwater should be discharged onto stable areas and should not be diverted into neighbouring properties unless written permission is obtained from the land owner(s). Avoid directing stormwater towards the site's entry/exit point.

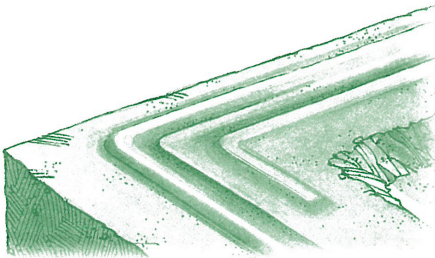

Advantages. There is a reduction in the amount of water that must be treated. The site is kept drier during wet periods.

Remember on steep sites, depending on duration of works and expected water flows, it maybe necessary to line the earth drain with turf or a geotextile fabric to avoid unnecessary soil erosion.

Fact Sheet 6


Stockpiles and Storage of Materials

Stockpiles and building materials are not to be stored on the footpath or within the road reserve. Where necessary, stockpile losses can be minimised with the use of covers.

All stockpiles and building materials should be located behind the sediment controls. Stockpiles should be protected from run-on water by placing diversion banks up-slope and with sediment control structures placed immediately down-slope.

The location of all stockpiles on-site should be at least 2 metres (preferably 5 metres) from hazard areas, especially likely areas of concentrated or high velocity flows such as waterways, kerb inlet pits, paved areas and driveways. The height of the stockpile should be less than 2 metres. The incorrect storage of stockpiles is a major source of stormwater pollution.

All site workers, subcontractors and delivery drivers need to be advised of their responsibilities to minimise soil erosion and pollution. The delivery driver must be given a designated location to deliver materials on site. This practice will also keep stockpiles away from site access and consequently keep sediment from being discharged to the stormwater system.

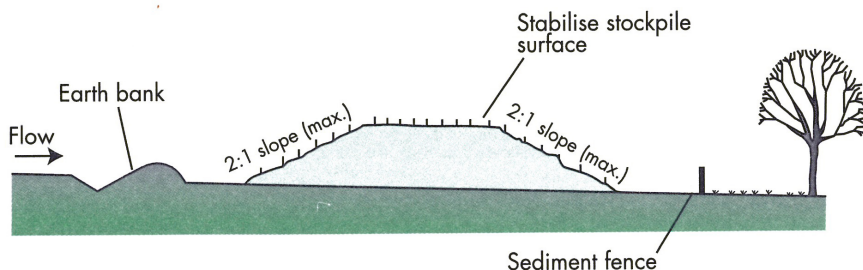

Fact Sheet 7

Grass Filter Strips

Strips of vegetation left or planted down-slope from earthworks provide a simple method of trapping coarse sediment.


The flatter and wider the filter strips are, the more effective they become. Grass filter strips have little effect in a storm, but form an important part of a sediment control program.

A 400 mm wide grass strip can be installed next to a kerb to stabilise the area between the kerb and footpath. It is also valuable for trapping sediment in very small storm events.

For best results it is advised that the whole footpath is planted.

Grass strips will stabilise a disturbed site quickly and easily and act as an excellent erosion & sediment control device.

Advantages. Grass filter strips can be very effective in removing coarse sediment upstream from detention basins or infiltration structures. They prevent sediment travelling from bare soil areas towards the formal drainage system.

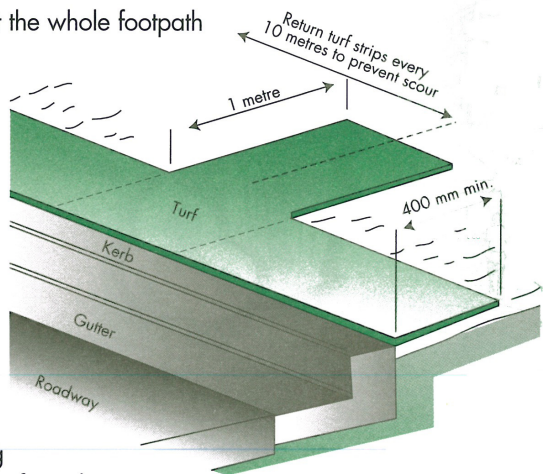

Remember that grass filter strips are only suitable on low grades.

Construction Notes


1. Install minimum 400 mm wide roll of turf on the footpath adjacent to the kerb and at the same level as the top of the kerb.
2. Lay 1.5 metre long turf strips (at 90 degrees) every 10 metres.
3. Rehabilitate disturbed soil behind the turf strip in accordance with the ESCP/SWMP.

Fact Sheet 8

Litter and Building Waste

All hard waste should be stored on-site in a way that prevents material loss caused by wind or water.

Smaller materials such as litter should be contained in covered bins or litter traps formed on three sides by geotextile as a windbreak.

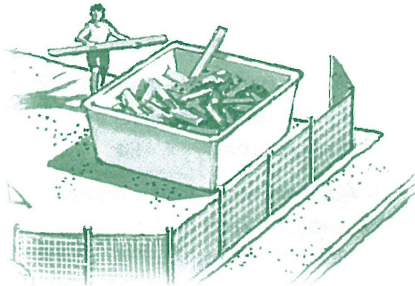


Fact Sheet 9

Service Trenches

Where possible, coordinate the various service connections so that a single trench can be used. Avoid trenching in areas where water flow is likely to concentrate. Alternatively, try to schedule work to periods when rainfall is low.

When Excavating Trench...

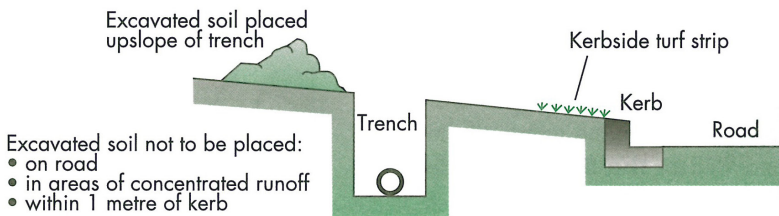

Try to limit the time trenches are open to fewer than three days and avoid opening them whenever the risk of storms is high. Remove and store vegetated topsoil (sod) so that it can be used to provide immediate erosion protection after backfilling.

Place the soil on the uphill side of trenches to divert water flow away from the trench line. Alternatively, use temporary bunds for similar effect. Backfill subsoil and compact to 95 per cent Standard Proctor. Then replace topsoil and any sod to match surrounding ground levels.

Construction Notes



1. Do not open any trenches unless it is likely to be closed in three days.
2. Place excavated material upslope of trench.
3. Divert runoff from the trenchline with diversions.
4. Revegetate.

Fact Sheet 10

Early Roof Downpipe Connection

Temporary or permanent downpipes should be installed at the same time as the roof is installed. The early connection of downpipes to the stormwater system will reduce site drainage problems.

This will reduce downtime following storm events. Connecting roof downpipes is a vital process to keep the water off the site and **"Keep the Soil on the Site"**.

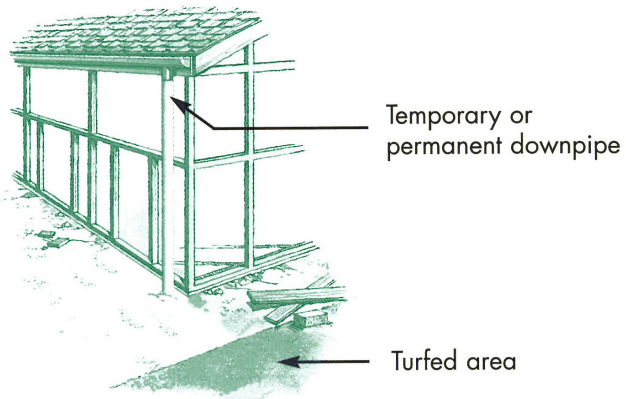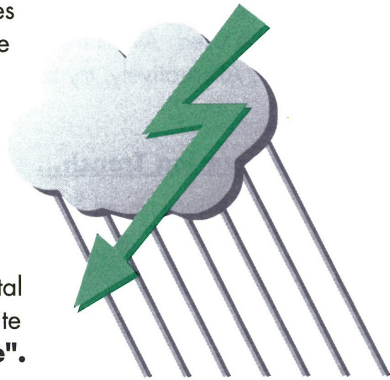

Maintenance of Control Measures

Proper maintenance of erosion and sediment controls is vital to their success. After a storm event the effectiveness of the established controls can be assessed. The site manager should check the operation of all erosion and sediment controls each day and initiate repair or maintenance as required.

An effective maintenance program should include ongoing modification to plans as development progresses. These plans are usually based on a specific landform, but as development proceeds changes occur in slope gradients and drainage paths.

Best practice includes anticipating potential risks as well as being prepared for abnormal circumstances and emergencies. This could include storing extra sediment fence fabric and posts on-site to facilitate emergency repairs, or ensuring that the sediment control contractor's phone number is available on site.


- ✓ The entry/exit pad will require reapplication of aggregate if excessive sediment build-up occurs.
- ✓ Clean any catch drains.
- ✓ Erosion in drainage channels should be repaired with rock, turf or erosion control matting.
- ✓ Sediment fences should be replaced if the fabric is ripped or otherwise damaged. Retrenching may also be needed. Sediment fences work well if they are maintained on a weekly basis and/or after every storm event.
- ✓ Keep an eye on the weather.

Site **Clean-up** and **Rehabilitation**

Accidental spills of soil or other materials onto the road or gutter should be removed at the end of the day's work. Materials should be swept from the road, not washed down the gutter. Following storms, the roadway and sediment controls should be inspected and all excessive sediment residues removed.

All areas disturbed by construction should be promptly stabilised (e.g revegetated) so that they can no longer act as a source of sediment.

If the site has not been rehabilitated and is handed over to a new homeowner, they need to understand their legal obligation associated with erosion and sediment control, especially if a sub-contractor is employed to complete landscaping works. Sediment control devices must be left in place until 70% revegetation cover has been established, or other measures installed in accordance with the local council's requirements.

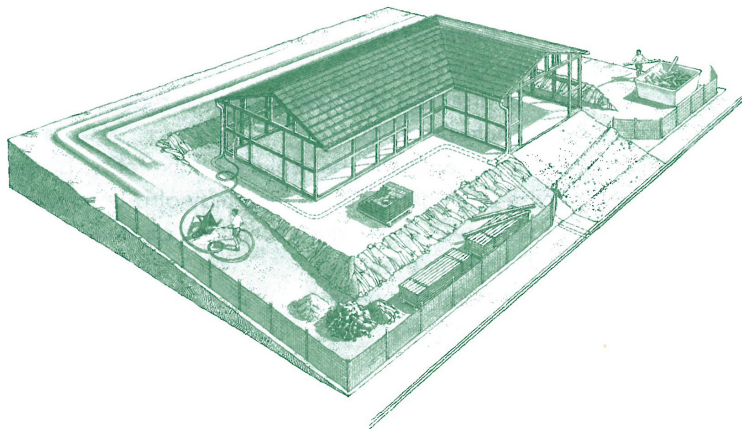

Notes

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

